

FFT Harmonics

Harmonics Analyses Option



For instruments type
X3M Flash-N
X3M-D Flash-D


The instruments type X3M, X3M-D, Flash-N and Flash-D feature the option of expanding their measurement capability by adding on new parameters to the existing ones. The FFT harmonics option adds all the parameters necessary for a comprehensive Harmonics analyses. It supports a 32 bit calculation which gives superior metering accuracy and enable to classify these instruments as genuine Energy & Harmonics analysers with a performance comparable with many sophisticated and expensive analysers.

The FFT harmonics option supports all the readings that are needed for a superior analyses of the problems related to harmonics. Readings give both the harmonics power and the direction providing an invaluable tool for immediate examination of the harmonics flow inside one's own plant and for identifying potentially undesirable imported problems.

Harmonics readings

Voltages Harmonics


- H01: value in V per phase
- H02...31: value in % of the fundamental per phase

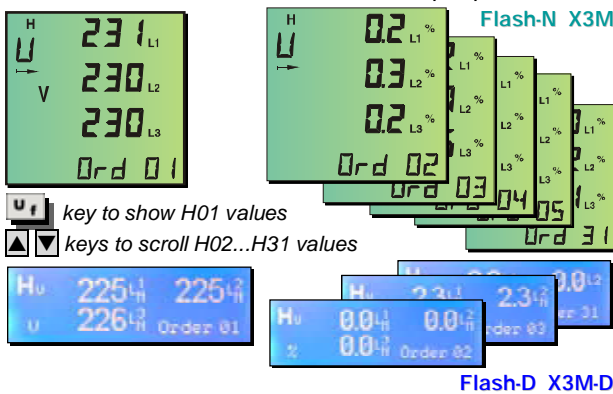

key to show H01 values
keys to scroll H02...H31 values

Currents Harmonics


- H01: value in A per phase
- H02...31: value in % of the fundamental per phase

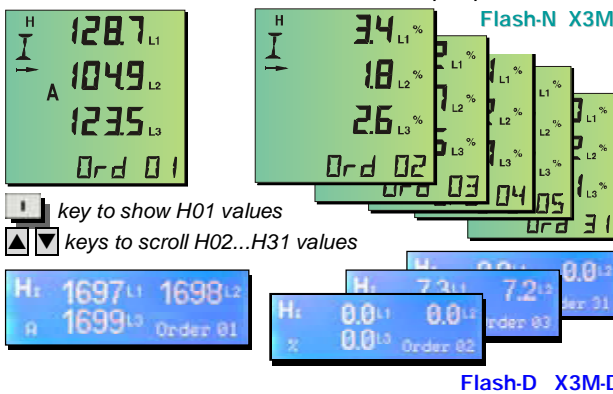

key to show H01 values
keys to scroll H02...H31 values

Harmonics Powers/Direction

- H01: value in W per phase
- H02...31: value in % of the fundamental per phase
- + or - sign indicating the harmonics origin downstream (load) or upstream (source) the measurement point.

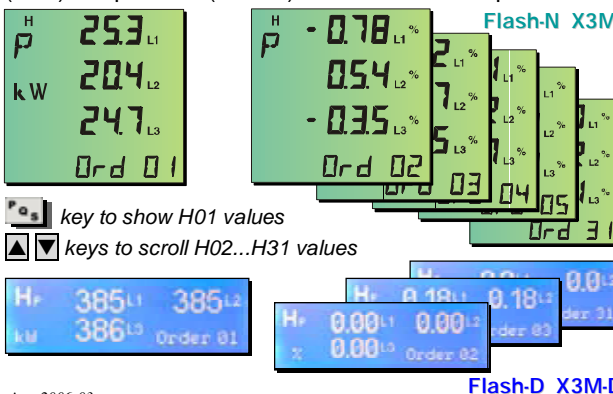

key to show H01 values
keys to scroll H02...H31 values

Harmonics surveys (X3M and X3M-D only)

With the X3M and X3M-D instruments, Harmonic Surveys can be made when the FFT upgrade is installed.

A date/time stamped sample of 42 default readings is automatically saved to the instruments' built-in memory on a circular buffer (FIFO) covering a 10-day survey period with samples taken every 2 minutes. Each sample covers:

- Voltage: U, THD-U, H1-U, H3-U, H5-U, H7-U and H9-U per phase
- Current: I, THD-I, H1-I, H3-I, H5-I, H7-I and H9-I per phase

The survey data is retrieved via serial line as daily files in the HTML, XLS or TXT formats (line commands required).

Modbus communication

A total of 384 readings related to harmonics are enabled as Modbus registers on serial port by the FFT harmonics option.

- Current and voltage harmonics per order and per phase
- Phase angle in degrees (range -180,0÷180,0°) per harmonic order, per phase, referred to U_{L1} fundamental. These parameters may be used for external reconstruction of vectorial graphs such as those supported by the Energy Brain software.

Technical specification

Harmonics range Odd and Even harmonics up to 31st order
Parameters ..H_U, H_I, H_P & sign (direction) per order, per phase
Parameters up date interval approx. 1 s
Readings indication:

H01floating point values with automatic unit/K/M exponent
H02-31 ... values in % of fund. (3½ digit, range 0,0÷100,0%)
H direction (+) or (-) sign on power

Modbus readings:

Voltage, current, phase angle per harmonic order, per phase
Accuracy:

H_U & H_I ±(0,1% rdg.+1LSD) for H01 to max. ± 2,0% for H31
H_P ±(0,2% rdg.+2LSD) for H01 to max. ± 2,0% for H31
Phase angles ± 0,1 deg. for H01 to max ± 3,0 deg. for H31

Sampling frequency 64 x f (mains frequency)
FFT size 64 points
FFT calculation accuracy 32 bits
Window rectangular
Minimum reading 1%

How to order

The FFT harmonics option can be implemented at any time, after meter installation and requires no tools nor accessories. It is simply performed by the entry, via front keyboard, of a unique PUK code that may be ordered for the serial number of the instrument to be upgraded.

Description	P.N.
FFT Harmonics option	PFSW 399-00
The S.No. of the instrument to be upgraded must be indicated on the order	

The FFT harmonics option may also be supplied in the meters by ordering the instruments type " H " (Flash-NH, Flash-DH, X3M-H, X3M-DH) with the option included.