




## Type **GSL(LS)/GST(LS)** 5øx20mm Special Lightning Surge Withstand Fuse

GSL(LS)

GST(LS)

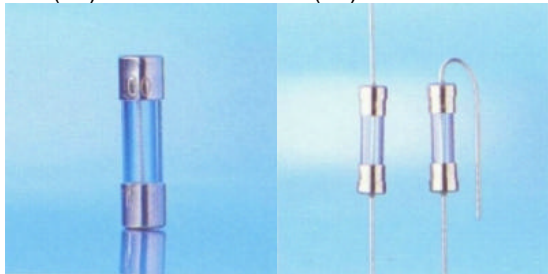

### Approvals

#### GSL

UL Listed 10mA~8A  
CSA Certified 10mA~8A

#### GST (With Pig-Tail)

UL Listed 10mA~8A  
CSA Certified 10mA~8A

### Electrical Characteristics

Rated Current	1 In		1.35In		2 In		5 In		10 In	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
10mA~8A	4 Hrs	1 Hrs	3 Sec	20 Sec	100 ms	1.5 Sec	30 ms	300 ms		

### Interrupting Ratings

10mA~5A: 10,000 amperes at 125V AC  
 10mA~1A: 35 amperes at 250V AC  
 1.25A~3.5A: 100 amperes at 250V AC  
 3.6A~8A: 200 amperes at 250V AC

### Operating Temperature

-55 to +125


### Lightning Surge Withstand Capability

Peak Currents And Perk 800V, 10x560 Microseconds.

### Options

With Heat Shrink Tubing (VM-1) over body  
 GST Series Available on Tape and reel

### Mechanical Dimensions

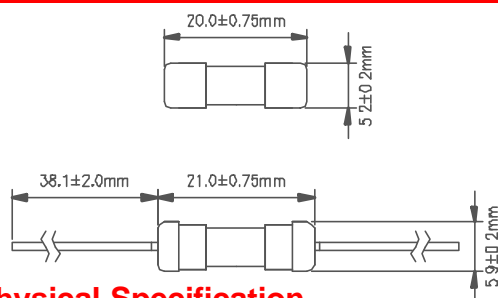

### Physical Specification

#### Materials

Glass body / Nickel Brass Caps  
 Lead Wire:  
 Tin-lead plated Copper, Diameter 0.8mm.

#### Packaging

In Bulk:  
 GSL – 1,000 pcs ; GST – 500 pcs per box