


Type SDL(LS)/SDP(LS) 4.5øx14.5mm

Special Lightning Surge Withstand Fuse

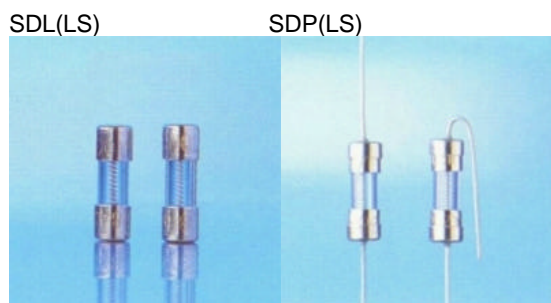

Approvals

SDL		SDP (With Pig-Tail)	
UL Listed	10mA~8A	UL Listed	10mA~3.5A
CSA Certified	10mA~8A	CSA Certified	10mA~3.5A

Electrical Characteristics

Rated Current	1 In		2 In		5 In		10 In	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
10mA~8A	4 Hrs	3 Sec	20 Sec	100 ms	1.6 Sec	30 ms	300 ms	

Interrupting Ratings

10mA~8A:	1,000 amperes at 125V AC
10mA~1A:	35 amperes at 125V AC
1.25A~3.5A:	100 amperes at 250V AC
3.6A~8A:	200 amperes at 250V AC

Operating Temperature

-55 to +125


Lightning Surge Withstand Capability

Peak Currents And Perk 800V, 10x560 Microseconds.

Options

With Heat Shrink Tubing (VM-1) over body
 SDP Series Available on Tape and reel

Mechanical Dimensions

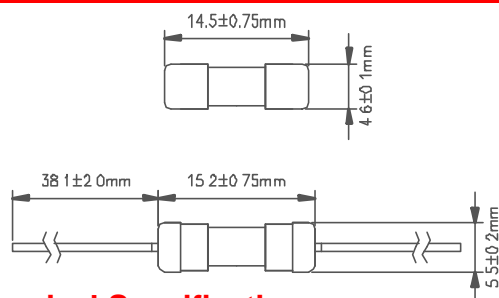

Physical Specification

Materials

Glass body / Nickel Brass Caps
 Lead Wire:
 Tin-lead plated Copper, Diameter 0.6mm.

Packaging

In Bulk:
 SDL – 2,000 pcs ; SDP – 500 pcs per box