




Type SJS/SJP 4.5øx14.5mm

Normal Blow Glass Fuse Series

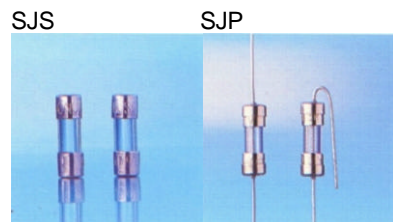

Approvals

SJS & SJP (With Pig-Tail)

MITI 1A~10A

Electrical Characteristics

Rated Current	1.3 In	1.6 In	2 In
	MIN	MAX	MAX
10mA~10A	4 Hrs.	1 Hrs	120 Sec

Interrupting Ratings

1A~10A: 500 amperes at 125V AC
100 amperes at 250V AC

Physical Specification

Materials


Glass body / Nickel Brass Caps
Lead Wire:
Tin-lead plated Copper, Diameter 0.6mm.

Packaging

In Bulk:
SJS – 2,000 pcs ; SJP – 1,000 pcs per box

Type SJL/SJT 4.5øx14.5mm

Slow Blow Glass Fuse Series

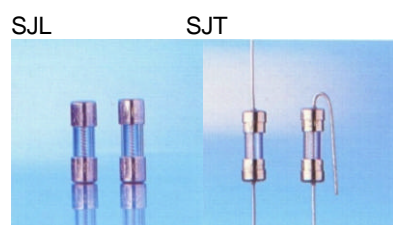

Approvals

SJL & SJT (With Pig-Tail)

MITI 1A~10A

Electrical Characteristics

Rated Current	1.3 In	1.6 In	2 In	
	MIN	MAX	MIN	MAX
10mA~10A	4 Hrs.	1 Hrs	3 Sec.	120 Sec

Interrupting Ratings

1A~10A: 500 amperes at 125V AC
100 amperes at 250V AC

Physical Specification

Materials

Glass body / Nickel Brass Caps
Lead Wire:
Tin-lead plated Copper, Diameter 0.6mm.

Packaging

In Bulk:
SJL – 2,000 pcs ; SJT – 1,000 pcs per box