



Gears & Fuse Gears

IEC General Purpose Fuses Ferrule Fuses CC, CCR

For Ferrule-type Fuses Ø 8-10-14-22

CC 8x31 fuse holder I_{th} max. 25A - Un 400V

for 8x31 fuses with or without blown-fuse indicator



Nb of Poles	Model with no indicator light screw-on		Model with no indicator light rail mounting		Nb Mod	Pckg
	Ref.Number	Cat. Number	Ref.Number	Cat. Number		
N	Y214634	CC8N	C217697	CC8NR	1	12
1	E215146	CC81	M218212	CC81R	1	12
1+N	G215654	CC81N	Q219250	CC81NR	2	6
2	L216164	CC82	R219780	CC82R	2	6
3	L216670	CC83	C222458	CC83R	3	4
3+N	Z217188	CC83N	V222980	CC83NR	4	3

CC 10x38 fuse holder I_{th} max. 32A - Un 500V

for 10x38 fuses with or without blown-fuse indicator or striker



Nb of Poles	Model with no indicator light screw-on		Model with no indicator light rail mounting		Nb Mod	Pckg
	Ref.Number	Cat. Number	Ref.Number	Cat. Number		
N	Y211046	CC10N	W214126	CC10NR	1	12
1	S211570	CC101	F215147	CC101R	1	12
1+N	Y212081	CC101N	M216165	CC101NR	2	6
2	N212601	CC102	M216671	CC102R	2	6
3	A213118	CC103	A217189	CC103R	3	4
3+N	S213617	CC103N	D217698	CC103NR	4	3

CC 14x51 fuse holder I_{th} max. 50A - Un 690V

for 14x51 fuses with or without blown-fuse indicator or striker



Nb of Poles	Model with no indicator light screw-on		Model with no indicator light rail mounting		Nb Mod	Pckg
	Ref.Number	Cat. Number	Ref.Number	Cat. Number		
N	R219251	CC14N	C201827	CC14NR	1,5	12
1	S219781	CC141	Z211047	CC141R	1,5	12
1+N	D222459	CC141N	T211571	CC141NR	3	6
2	W222981	CC142	Z212082	CC142R	3	6
3	D200770	CC143	P212602	CC143R	4,5	4
3+N	V201314	CC143N	B213119	CC143NR	6	3

Gears & Fuse Gears



IEC General Purpose Fuses Ferrule Fuses CC, CCR

For Ferrule-type Fuses Ø 8-10-14-22

Ith max. 125A - Un 690V

for 22x58 fuses with or without blown-fuse indicator or stiker

Nb of Poles	Model with no indicator light screw-on		Model with no indicator light rail mounting		Nb Mod	Pckg
	Ref. Number	Cat. Number	Ref. Number	Cat. Number		
N	T213618	CC22N	N216672	CC22NR	2	6
1	X214127	CC221	B217190	CC221R	2	6
1+N	A214636	CC221N	E217699	CC221NR	4	3
2	G215148	CC222	P218214	CC222R	4	3
3	J215656	CC223	C218732	CC223R	6	2
3+N	N216166	CC223N	S219252	CC223NR	8	1




Multi-pole assembly accessories

Nb. of Poles	CC8x31 and CC10x38		CC14x51		CC22x58		Pckg
	Ref. Number	Cat. Number	Ref. Number	Cat. Number	Ref. Number	Cat. Number	
2	E200771	CC810ROASS2	C213120	CC14ROASS2	P216167	CC22ROASS2	10*
3	W201315	CC810ROASS3	V213619	CC14ROASS3	P216673	CC22ROASS3	10*
4	D201828	CC810ROASS4	Y214128	CC14ROASS4	C217191	CC22ROASS4	10*
Adapter for symmetrical rail	A211048	ADAP-RSCC810	F217700	ADAPCC1422	F217700	ADAPCC1422	10*



Dimensions

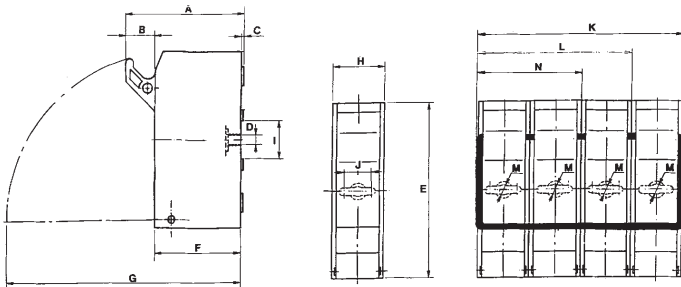

	CC8/10	CC.14	CC.22
A	40	62	71
B	9	15,5	16
C	2	1	1
D	5,5	7,25	7,25
E	77,5	94	106
F	33	45,5	55
G	100	127	148
H	7,5	27	34
I	46	20,3	20,3
J	-	15,2	18
K	77,5	112	139
L	60	85	105
M	42,5	6	6
N	-	58	71

- Mounting on symmetrical DIN rail with adapter.
- Wiring cross sections
 - CC8/CC10; 1x10 mm²
 - CC14; 1x25 mm²
 - CC22; 1x50 mm²
- Screw-on mounting in back of panel
- Neutral tubes are systematically built in

- **Weight of a single-pole model**
 - 8x31 ; 56 g
 - 10x38 ; 48 g
 - 14x51 ; 130 g
 - 22x58 ; 190 g

IEC General Purpose Fuses Ferrule Fuses CC, CCR



For Ferrule-type Fuses Ø 8-10

CCR 8x31 fuse holder I_n max. 25A - Un 400V

for 8x31 fuses, with or without blown-fuse indicator




Nb. of Poles	Model with no indicator light			
	Ref.Number	Cat. Number	Nb Mod	Pckg
N	Z214635	CCR810N	1	12
1	C200769	CCR81	1	12
1+N	A218730	CCR81N	1	12
2	V233721	CCR82	2	6
3	W233722	CCR83	3	4

CCR 10x38 fuse holder I_n max. 32A - Un 500V

for 10x38 fuses, with or without indicator or striker



Nb. of Poles	Model with no indicator light			
	Ref.Number	Cat. Number	Nb Mod	Pckg
N	Z214635	CCR810N	1	12
1	N218213	CCR101	1	12
1+N	H215655	CCR1N1M	1	12
2	X233723	CCR102	2	6
3	Y233724	CCR103	3	4

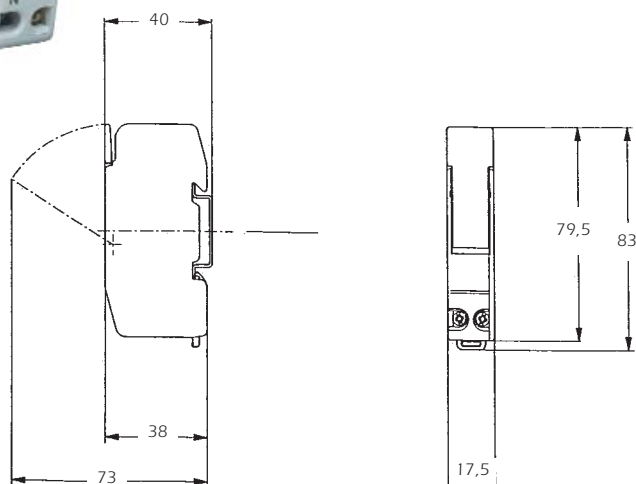

- Direct mounting on symmetrical DIN rail
- Wire cross sections: 1 x 10mm².
- Compact footprint.
- Insulated to IP 20 standard
- Single-pole weight
 - 8x31 ; 58g
 - 10x38 ; 63g
- Neutral tubes are systematically built in

With the indicator light a blown fuse can be quickly located if power is still on

Assembly accessory

Accessories	Ref.Number	Cat. Number	Pckg
CCR multi-pole assembly kit	Z233725	CMS810PAK	12*

* 12 per bag